Inspired



Inspired

Inspired is influenced by the diverse beauty of limestone, with each individual tile featuring a vast array of natural features and effects. Available in a huge variety of sizes, including super large format slabs..




Inspired Eus



ABOVE Floor: 3YFX101

RIGHT Floor: 3YFX111 Wall: 3YFX111



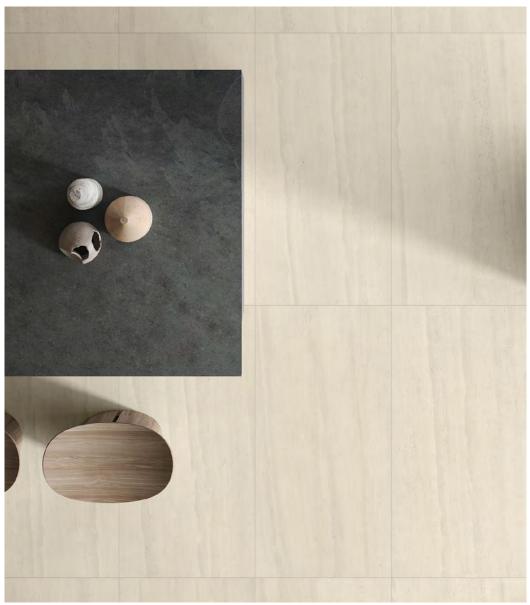

ABOVE Floor: 3YFX102





DECORS



Decor A

Available in all colours
expect Poussain

600x1200x9mm

Matt R10 (A+B)



Decor B

Available in all colours
expect Poussain
600x1200x9mm

Matt R9

MOSAICS



Mosaic
Available in all colours
expect Poussain
300x300x9mm
Matt R9

SIZES AND FINISHES

	100×600 9mm	200x600 9mm	300×600 9mm	400×600 9mm	600×600 9mm	600×600 20mm	600×600 30mm	600×900 20mm	600x1200 9mm	600×1200 20mm	800×800 9mm	800x800 20mm	1200×1200 9mm	1200×2780 6mm	1600×3200 6mm
Ruben						♦			•	♦		♦	•	•	
Sandberg						•		•		♦		♦			
Elder						•		•		♦					
Poussin										•					
I OUSSIII															
Diamandis						♦	♦		•			*			
TO AND THE PARTY OF THE PARTY O	-	-				♦	♦	♦	•	*	-	*		•	
Diamandis						*	♦	*		· · · · · · · · · · · · · · · · · · ·				•	

■ Matt R9 ■ Matt R10 (A+B) ◆ Grip R11 (A+B+C)

Inspired

APPEARANCE

Limestone

MATERIAL

Porcelain

USAGE

Floors and Walls

SHADE VARIATION

V2 - Light

SPECIAL PIECES

For more information contact our sales team.

BULLNOSE

72x600mm

STEP TREAD

330x1200mm



STEP TREAD

330x600mm



STEP TREAD CORNER

330x330mm



ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY

Conforms

10. MOISTURE EXPANSION

< 0.1 (mm/m)

3. WATER ABSORPTION

0.1%

12. FROST RESISTANCE

Conforms

4. FLEXURAL STRENGTH

>10.000N - >21.000N

13. CHEMICAL RESISTANCE

Conforms

6. DEEP ABRASION RESISTANCE

Conforms

14. STAIN RESISTANCE

Conforms

8. LINEAR THERMAL EXPANSION

~7 (10⁻⁶ °C⁻¹)

SLIP RESISTANCE (DIN 51130-51097)

Matt R10 (A+B) Grip R11 (A+B+C)

Grip R11 (A+B+C) Grip R11 (A+B+C) 20mm

9. THERMAL SHOCK RESISTANCE

Conforms

- -

COILLOLING

MANUFACTURER CERTIFICATIONS:

Declare.

ecovadis

GREENGUAR

EPD: Available ISO 14001

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to PTV BS7976-2. HSE surface roughness and NCS Colour values are also available upon request.

All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2023. 014.

EC1M 5RJ