


Quarry

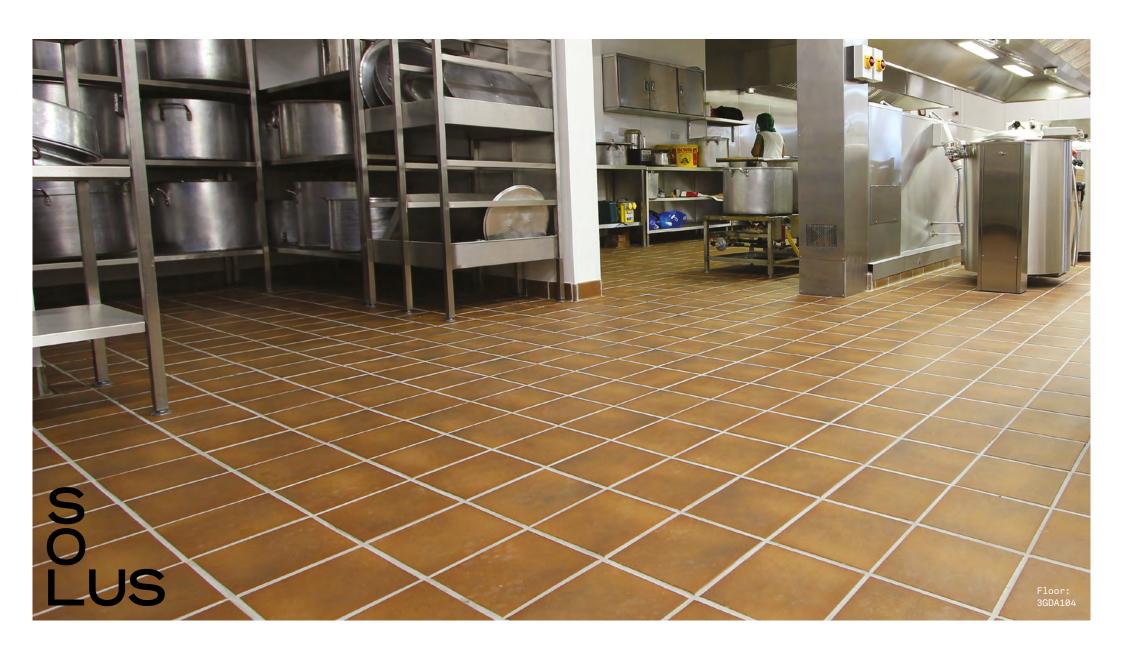

The bold Quarry range comes in four deep colours, four versatile sizes and a high slip resistance.
The series is inspired by traditional Mediterranean styles and colours and is practical, stylish and classic.

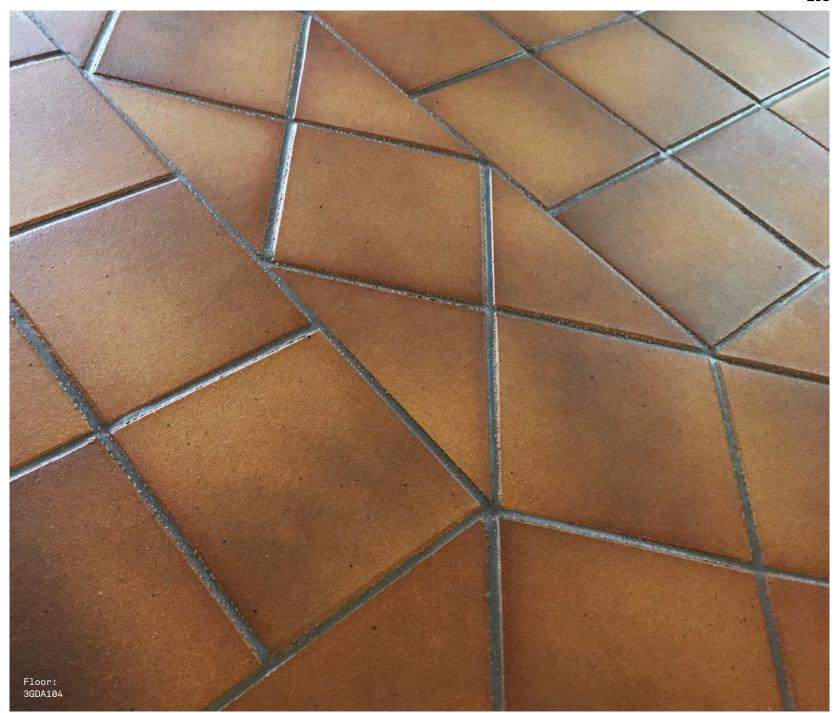


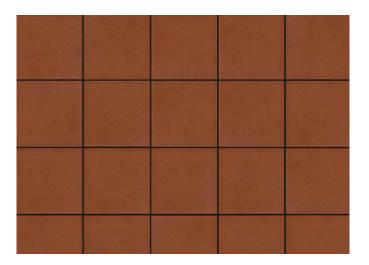

Red 3GDA101



Flame Brown 3GDA104

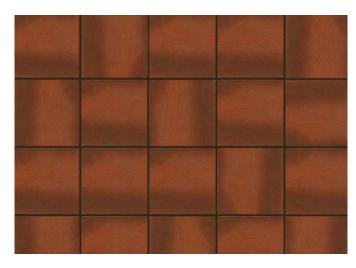

Flame Red 3GDA102



Black 3GDA105



SIZES AND FINISHES

	150×150 12mm	200×200 13mm	250×250 14mm	330×330 16mm	
Red	₩ △	9	•	*	
Flame Red	9				
Flame Brown	₩ △	•	•		
Black	₩ △	*			

ightharpoonup Natural R11 (A+B+C) \triangle Anti Slip R13

NOTES

Quarry

APPEARANCE

Terracotta

MATERIAL

Terracotta

USAGE

Floors and Walls

SHADE VARIATION

V1 - Uniform

SPECIAL PIECES

For more information contact our sales team.

EDGE

150x150mm



STAIR TREAD CORNER

150x150mm



SKIRTING BOARD

150x115mm



INTERNAL ANGLE

20x115mm



EXTERNAL ANGLE

20x115mm



ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY

Conforms

10. MOISTURE EXPANSION

No rating

3. WATER ABSORPTION

3 < E ≤ 6%

12. FROST RESISTANCE

Conforms

4. FLEXURAL STRENGTH

50 N/mm²

13. CHEMICAL RESISTANCE

Conforms

6. DEEP ABRASION RESISTANCE

290-393 mm³

14. STAIN RESISTANCE

Class 5

8. LINEAR THERMAL EXPANSION

5.2x10^{-6x} °C

SLIP RESISTANCE (DIN 51130-51097)

Natural R11 (A+B+C) Anti Slip R13

9. THERMAL SHOCK RESISTANCE

Conforms

MANUFACTURER CERTIFICATIONS:

EPD: Available ISO 14001

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to PTV BS7976-2. HSE surface roughness and NCS Colour values are also available upon request.

All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2023. 011a.



EC1M 5RJ