

22 COLOURS | 1 FINISH | 1 SIZE

# Villes

S  
O  
S  
L  
U  
S



Wall:  
6TX1106



# Villes

A smooth and seductive range of micro mosaics, Villes creates unique and memorable wall surfaces that look unlike any other tile range. Featuring a range of matt, gloss and metallic ceramic pieces, Villes will add sense of luxury to any space.




Hot tub:  
6TXT114






ABOVE  
Wall:  
6TXT118

RIGHT  
Wall:  
6TXT112

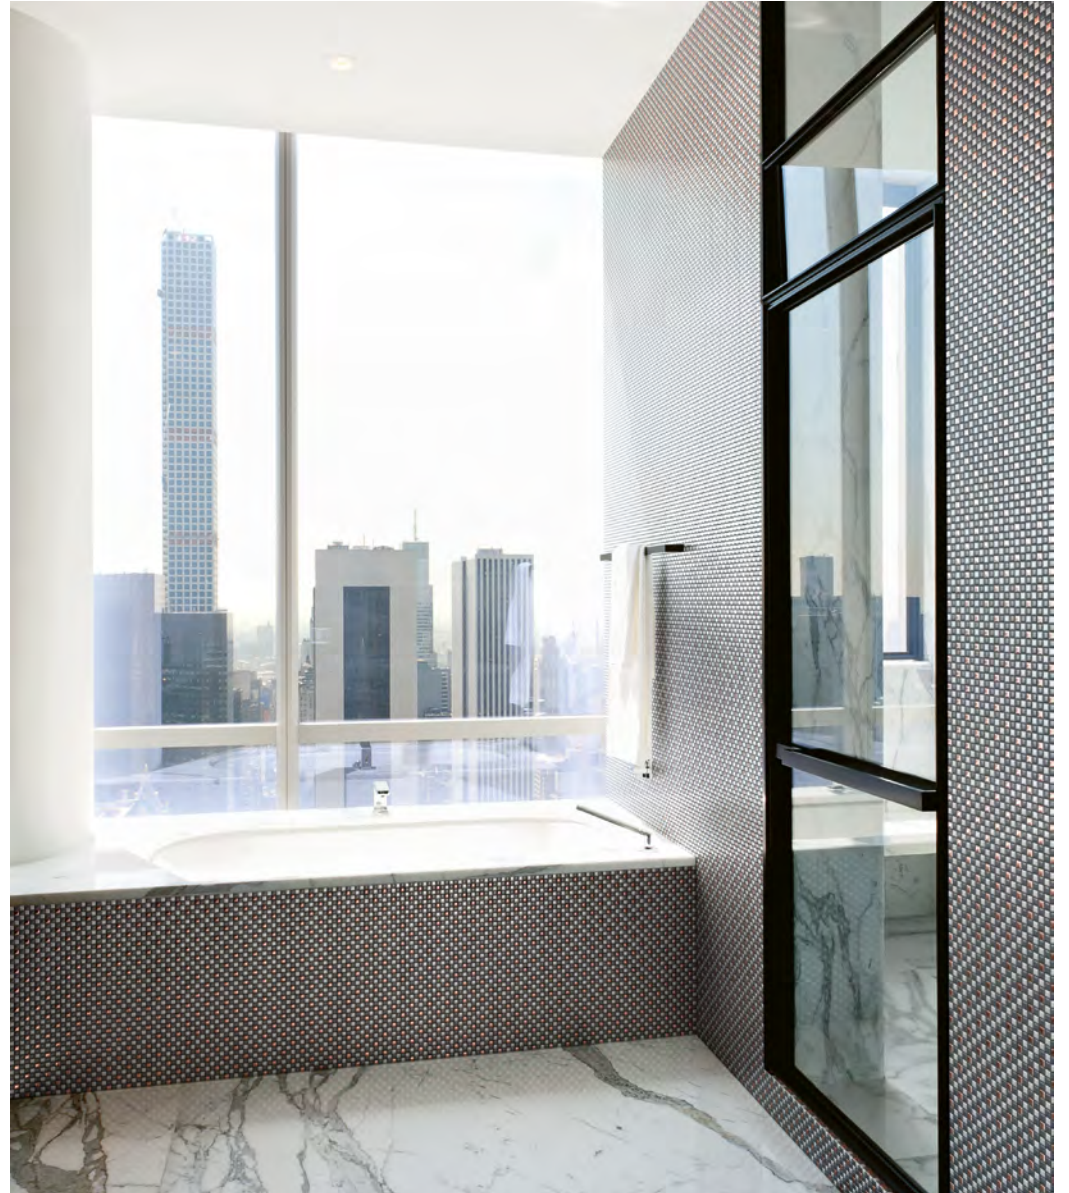


ABOVE  
Wall:  
6TXT117







Cannes  
6TXT101




Beziers  
6TXT102




Colmar  
6TXT103




Arles  
6TXT104




Vannes  
6TXT105



Grasse  
6TXT106




Laval  
6TXT107



Annecy  
6TXT108




Narbonne  
6TXT109



Quentin  
6TXT110



Roche  
6TXT111



Frejus  
6TXT112



Evreux  
6TXT113




Troyes  
6TXT114




Lorient  
6TXT115



Chambéry  
6TXT116




Genoble  
6TXT117




Rouen  
6TXT118




Toulon  
6TXT119



Clermont  
6TXT120



Ferrand  
6TXT121



Bethune  
6TXT122

## APPEARANCE

Mosaic

## MATERIAL

Ceramic

## USAGE

Floors and Walls

## SHADE VARIATION

V1 - Uniform

## FINISHES AND SIZES

---

All mosaic tiles shown are 7.2mm thick and come in a 300x300mm module with a Glazed finish.

## ISO 10545 RESULTS

---

### 2. DIMENSIONS AND SURFACE QUALITY

Conforms

---

### 3. WATER ABSORPTION

< 1%

---

### 4. FLEXURAL STRENGTH

> 50 N/mm<sup>2</sup>

---

### 6. DEEP ABRASION RESISTANCE

No rating

---

### 8. LINEAR THERMAL EXPANSION

$7 \times 10^{-6}$  °C

---

### 9. THERMAL SHOCK RESISTANCE

Conforms

---

### 10. MOISTURE EXPANSION

< 0.04%

---

### 12. FROST RESISTANCE

Conforms

---

### 13. CHEMICAL RESISTANCE

Conforms

---

### 14. STAIN RESISTANCE

Conforms

---

### SLIP RESISTANCE (DIN 51130-51097)

Ask for details

## MANUFACTURER CERTIFICATIONS:

EPD: Available

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to PTV BS7976-2. HSE surface roughness and NCS Colour values are also available upon request.

All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2023. 002a.